


MOD. VB110M




Technische Spezifikationen

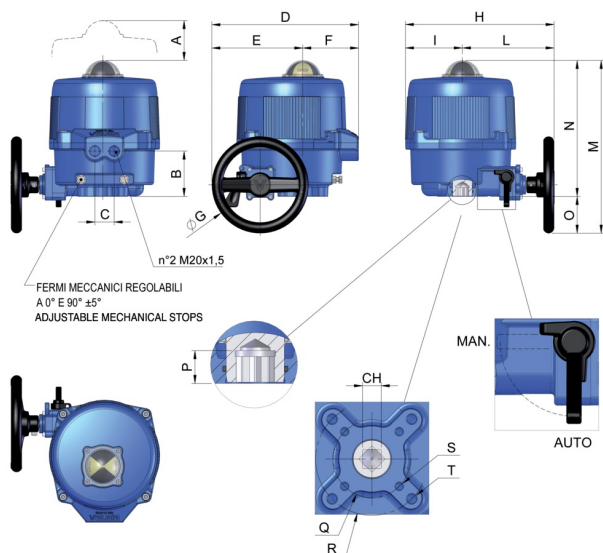


MOD	FORATURA DRILLING ISO 5211 FLANGE	CH	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	T
MOD. VB110M	F07-F10	17	139	82	35	266	165	101	175	270	103	167	313	246	67	19	70	102	M8X15	M10X15

Elektrische diagramme


SCHEMA ELETTRICO DAL VB030 AL VB350 e DAL VB015M AL VB350M 12V AC/DC 50/60 Hz, 24V AC/DC 50/60 Hz, 100-240V AC 50/60 Hz
ELECTRIC WIRING FROM VB030 TO VB350 AND FROM VB015M TO VB350M 12V AC/DC 50/60 Hz, 24V AC/DC 50/60 Hz, 100-240V AC 50/60 Hz

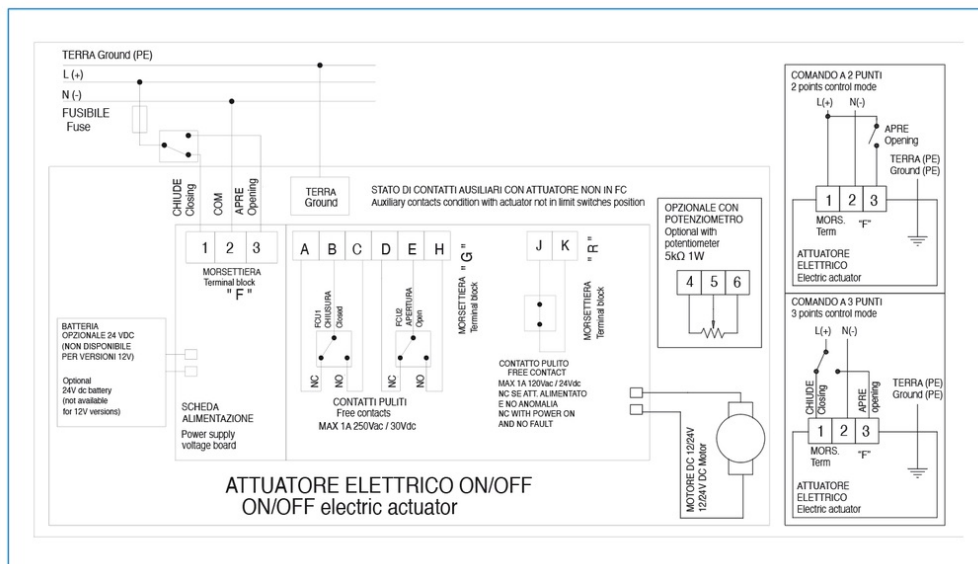

SCHEMA ELETTRICO CON POSIZIONATORE DAL VB030 AL VB350 e DAL VB015M AL VB350M 12V AC/DC 50/60 Hz, 24V AC/DC 50/60 Hz, 100-240V AC 50/60 Hz
ELECTRIC WIRING WITH POSITIONER FROM VB030 TO VB350 AND FROM VB015M TO VB350M 12V AC/DC 50/60 Hz, 24V AC/DC 50/60 Hz, 100-240V AC 50/60 Hz

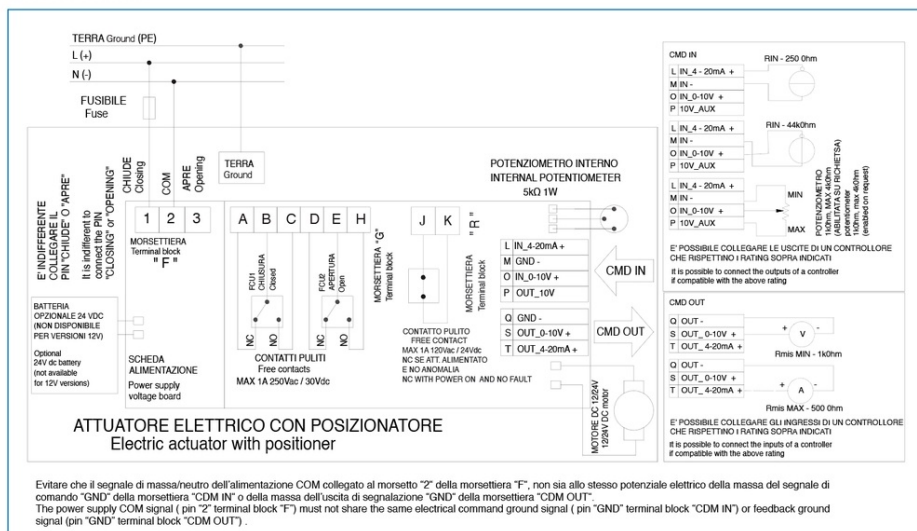

SCHEMA ELETTRICO CON POSIZIONE INTERMEDIA DAL VB030 AL VB350 E DAL VB030M AL VB350M 24V AC/DC 50/60Hz, 100-240V AC 50/60Hz
ELECTRIC WIRING WITH MIDDLE POSITION FROM VB030 TO VB350 AND FROM VB030M TO VB350M 24V AC/DC 50/60Hz, 100-240V AC 50/60Hz

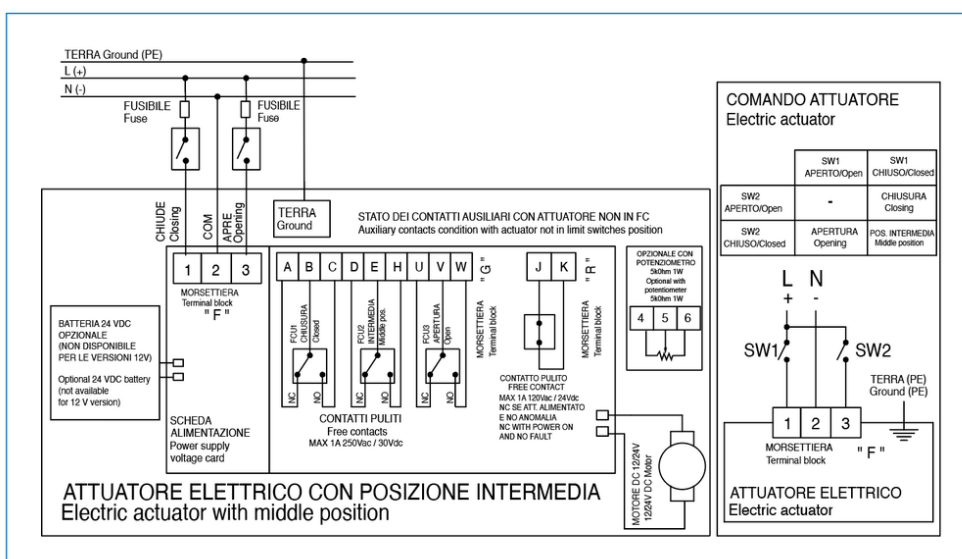

Anwendungen



FOOD &
BEVERAGE



HVAC



PAINTS &
SOLVENTS



WATER
TREATMENT



CHEMICAL



OEM



MARINE